

# FOX.50



IP66	IK09	CREE XP-G	RECYCLE
FAILURE RATE < 0,1% after 25,000h	LIFE TIME Tested over 50,000h	MIN -20°C MAX 55°C	CLASE I
SP US	CE	RoHS	RoHS 2

CIRCULAR PROJECTORS  
**FOX SERIES**

## References

Code	Type	Finish	Light Color	Power	Lense		Voltage	Driver	
<b>VL-F50</b>	<b>A</b> Base <b>B</b> Base 2	<b>LG</b> Light grey	<b>White</b>						
		<b>DK</b> Dark grey	<b>W24</b> 2400K	<b>190W</b>	<b>1,5°</b> (190W)	<b>2°</b>	<b>UNIV</b> 100-264Vac	<b>STD</b> ON/OFF	
	<b>WH</b> White	<b>W27</b> 2700K	<b>300W</b>	<b>4,5°</b>	<b>8°</b>	<b>010</b> 0-10V			
	<b>BK</b> Black	<b>W30</b> 3000K	<b>360W</b>	<b>12°</b>	<b>20°</b>	<b>DALI</b>			
	<b>RAL</b> Any RAL color	<b>W40</b> 4000K		<b>30°</b>	<b>40°</b>	<b>CAS</b> Casambi			
		<b>W60</b> 6000K		<b>60°</b>	<b>5x20°</b>				
				<b>10x70°</b>					
				<b>Single Color (SC)</b>					
				<b>R</b> Red	<b>360W</b>	<b>4,5°</b>	<b>8°</b>	<b>UNIV</b> 100-264Vac	<b>STD</b> ON/OFF
				<b>B</b> Blue		<b>12°</b>	<b>20°</b>	<b>010</b> 0-10V	
				<b>G</b> Green		<b>30°</b>	<b>40°</b>	<b>DALI</b>	
				<b>A</b> Amber		<b>60°</b>	<b>5x20°</b>	<b>CAS</b> Casambi	
				<b>10x70°</b>					
				<b>RGBW</b>					
				<b>RGBW3</b>	<b>300W</b>	<b>8°</b>	<b>15°</b>	<b>UNIV</b> 100-264Vac	<b>DALI</b>
			4 in 1 Chip	<b>360W</b>	<b>20°</b>	<b>30°</b>		<b>DMX</b>	
			RGB+W3000K		<b>60°</b>	<b>15x60°</b>		<b>CAS</b> Casambi	
			<b>RGBW4</b>						
			4 in 1 Chip						
			RGB+W4000K						
			<b>RGBW7</b>						
			7 in 1 Chip						
			RGBWCLA						

Reference example

VL-F50-B-BK-RGB7-36W-8°-UNIV-DMX

## Variations




**A**  
Base




**B**  
Base 2

## Dimensions

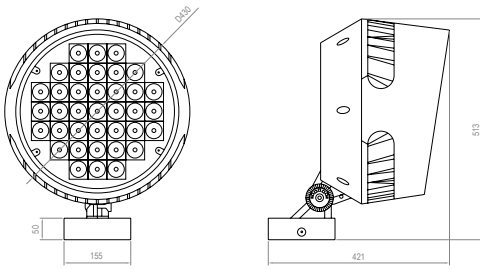


**TYPE A**

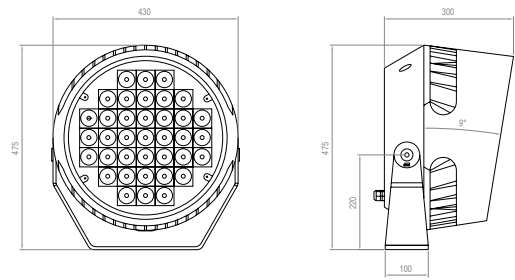

**TYPE B**

## Accessories

Code	Accessories
<b>VL-F50</b>	<b>HC</b> Honeycomb Grid <b>MSH</b> Mesh

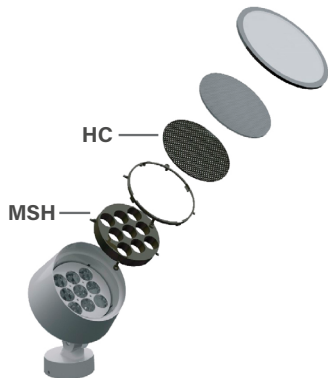

Code	Accessories
<b>VL-F50</b>	<b>*CBLX</b> Special length cable*

*\* Instead of X, put length of cable needed  
Example: VL-F50-CBL-10m*