

ISVI.18



IP66	IK09	CREE XP-G	RECYCLE
FAILURE RATE < 0,1% after 25,000h	LIFE TIME Tested over 50,000h	MIN -20°C MAX 55°C	CLASE I
SP US	RoHS	CE	RoHS 2

CIRCULAR PROJECTORS
ISVI SERIES


References

Code	Type	Finish	Light Color	Power	Lense		Voltage	Driver	
VL-IV18	A Base	LG Light grey	White						
	B Base 2	DK Dark grey	W24 2400K	21W	8°	12°	UNIV 100-264Vac	STD ON/OFF	
	C Pole Arm	WH White	W27 2700K	30W	20°	30°			
	F Nut	BK Black	W30 3000K	45W	45°	60°	24 24Vdc		
		RAL Any RAL color	W40 4000K		15x30°	10x60°			
			W60 6000K						
				Single Color (SC)					
				R Red	21W	8°	12°	UNIV 100-264Vac	STD ON/OFF
				B Blue	30W	20°	30°		
				G Green	45W	45°	60°	24 24Vdc	
			A Amber		15x30°	10x60°			

Reference example

VL-IV18-A-LG-W60-45W-8-UNIV-STD

Variations




A
Base



B
Base 2




C
Pole Arm
D=45mm




F
Nut (M10x1,5mm)


Dimensions




TYPE A



TYPE B

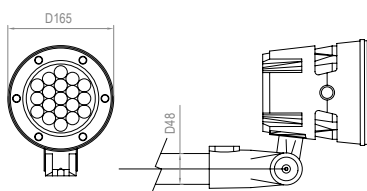

TYPE C



TYPE F

Accessories

Code	Accessories
------	-------------

VL-IV18


HO Hood
VS Visor

Code	Accessories
------	-------------

VL-IV18

*SPK SPIKE
*1BR Braket for 1 projector
*2BR Braket for 2 projector
*BX Elevated Box
*CBLX Special length cable


* Must be used with Type F
* Must be used with Type C
* Must be used with Type C
* Must be used with Type F
* Instead of X, put length of cable needed
Example: VL-IV18-CBL-10m

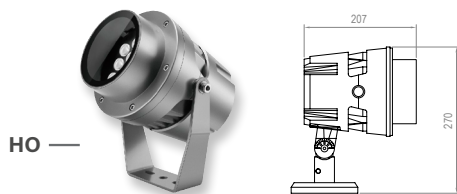

HO




SPK

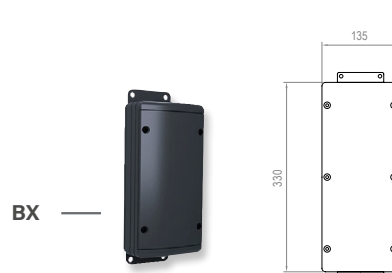


BX



VS

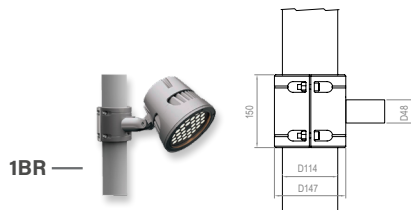

1BR

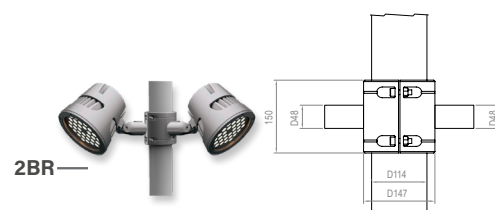

2BR