



KUBO.25



RECTANGULAR PROJECTORS
KUBO SERIES

References

Code	Type	Finish	Light Color	Power	Lense		Voltage	Driver	
VL-KUB25	A Base	LG Light grey	White						
	B Base 2	DK Dark grey	W24 2400K	90W	1,5° (90W)	2,5°	UNIV 100-264Vac	STD ON/OFF	
	C Pole Arm	WH White	W27 2700K	120W	4,5°	8°		010 0-10V	
		BK Black	W30 3000K		12°	20°	DALI		
		RAL Any RAL color	W40 4000K		30°	40°	CAS Casambi		
			W60 6000K		60°	5x20°			
					10x70°	ASYM			
				Single Color (SC)					
				R Red	120W	4,5°	8°	UNIV 100-264Vac	STD ON/OFF
				B Blue		12°	20°	010 0-10V	
				G Green		30°	40°	DALI	
				A Amber		60°	5x20°	CAS Casambi	
						10x70°			
				RGBW					
				RGBW3	150W	8°	15°	UNIV 100-264Vac	DALI
			4 in 1 Chip		20°	30°	36 36Vdc	DMX	
			RGB+W3000K		60°	15x60°		CAS Casambi	
			RGBW4						
			4 in 1 Chip						
			RGB+W4000K						
			RGBW7						
			7 in 1 Chip						
			RGBWCLA						

Reference example

VL-KUB25-C-DK-W60-120W-60°-UNIV-STD

Variations



A
Base




B
Base 2




C
Pole Arm
D=45mm


Dimensions

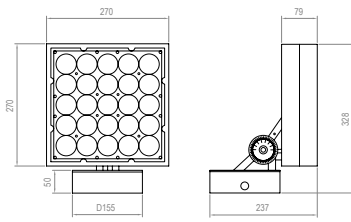

TYPE A

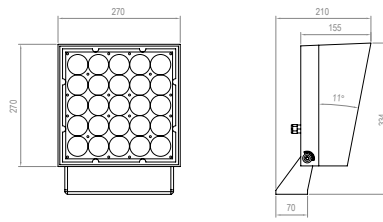

TYPE B


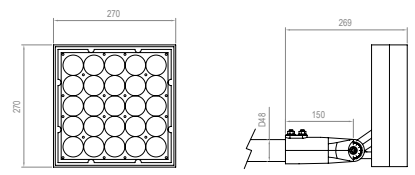


TYPE C

Accessories

Code	Accessories
------	-------------

VL-KUB25 HC Honeycomb Grid
MSH Mesh



Code	Accessories
------	-------------

VL-KUB25 SHD Shields
 *1BR Bracket for 1 projector * Must be used with Type C
 *2BR Bracket for 2 projector * Must be used with Type C
 *CBLX Special length cable * Instead of X, put length of cable needed
 Example: VL-KUB25-CBL-10m

