


KUBO.4



RECTANGULAR PROJECTORS KUBO SERIES

References

Code	Type	Finish	Light Color	Power	Lense	Voltage	Driver		
VL-KUB4	A Base	LG Light grey	White						
	B Base 2	DK Dark grey	W24 2400K	20W	2°	UNIV 100-264Vac	STD ON/OFF		
	C Pole Arm	WH White	W27 2700K		8°				
	D Pole mounted	BK Black	W30 3000K		20°				
	E Stripe mounted	RAL Any RAL color	W40 4000K		40°			24 24Vdc	DALI
	F Nut		W60 6000K		5x20°				
				ASYM	10x70°	CAS Casambi			
	Single Color (SC)								
			R Red	20W	4,5°	UNIV 100-264Vac	STD ON/OFF		
			B Blue		12°				
			G Green		30°				
			A Amber		60°				
					10x70°				
	RGBW								
			RGBW3	20W	8°	24 24Vdc	DALI		
			4 in 1 Chip	30W	15°				
			RGB+W3000K		30°				
			RGBW4		15x60°				
			4 in 1 Chip					CAS Casambi	
			RGB+W4000K						

Reference example

VL-KUB4-A-WH-W24-20W-60°-STD

Variations



A
Base




B
Base 2



C
Pole Arm
D=45mm



D
Pole mounted
D67-325mm




E
Stripe mounted




F
Nut (M10x1,5mm)


Dimensions

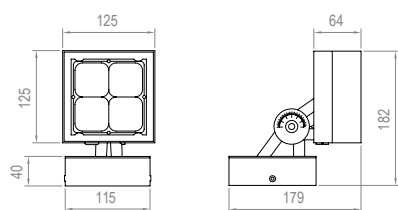


TYPE A

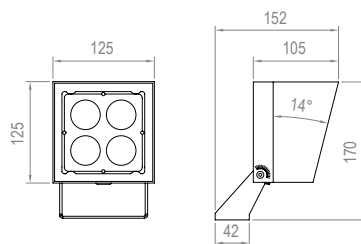


TYPE B

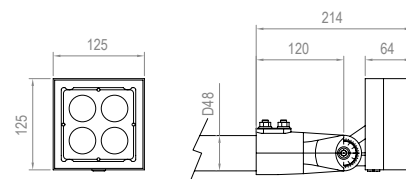


TYPE C



TYPE D

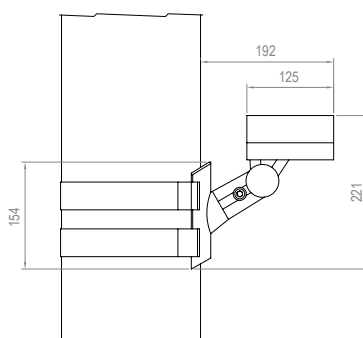

TYPE E

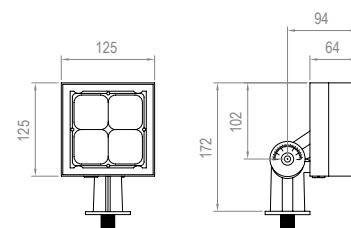

TYPE F


Accessories

Code	Accessories
VL-KUB4	HC Honeycomb Grid MSH Mesh

HC



MSH



Code	Accessories
VL-KUB4	SHD Shields *SPK SPIKE *1BR Bracket for 1 projector *2BR Bracket for 2 projector *BX Elevated Box *CBLX Special length cable

* Must be used with Type F
* Must be used with Type C
* Must be used with Type C
* Must be used with Type F
* Instead of X, put length of cable needed
Example: VL-KUB9-CBL-10m


SHD





SPK



BX

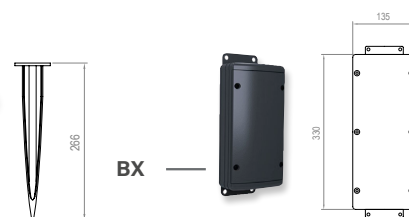

1BR



2BR

