


LINNEA.60

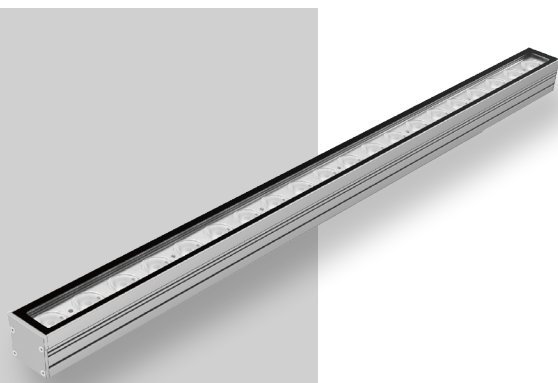

IP66	IK09	CREE XP-G	RECYCLE
FAILURE RATE < 0,1% after 25,000h	LIFE TIME Tested over 50,000h	MIN -20°C MAX 55°C	CLASE I
SP US	CE	RoHS	RoHS 2

LINNERS
LINNEA SERIES


References

Code	Finish	Light Color	Lenght-Power	Lense		Voltage	Driver
VL-LN.60	LG Light grey RAL Any RAL color	White					
		W24 2400K	300mm-30W	2,5°	6°	UNIV 100-264Vac	STD ON/OFF
	W27 2700K	500mm-48W	12°	20°	010 0-10V		
	W30 3000K	1000mm-95W	30°	40°	DALI		
	W40 4000K		60°	10x70°	CAS Casambi		
	W60 6000K		5x20°				
	Single Color (SC)						
	R Red	300mm-30W	6°	12°	UNIV 100-264Vac	STD ON/OFF	
	B Blue	500mm-48W	20°	30°		010 0-10V	
	G Green	1000mm-95W	40°	60°		DALI	
	A Amber		10x70°	5x20°		CAS Casambi	
	RGBW						
	RGBW3	500mm-50W	15°	20°	24 24Vdc	DALI	
	4 in 1 Chip	1000mm-100W	30°	60°		DMX	
	RGB+W3000K		10x30°	10x60°		CAS Casambi	
RGBW4	4 in 1 Chip						
	RGB+W4000K						
RGBW7	7 in 1 Chip						
	RGBWCLA						

Reference example



VL-LN.60-R-300mm-30W-6-UNIV-STD

Dimensions

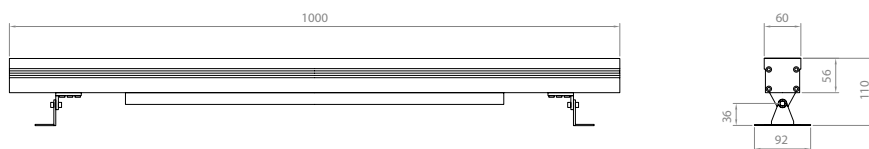

Accessories

Code	Accessories
VL-LN.60	HC Honeycomb Grid VS Visor



Code	Accessories
VL-LN.60	XLL Extra long legs IO In&out cable with connectors *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-LN60-CBL-10m*

