


WUS



IP67



IK10



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



UNDERGROUND

UNDERGROUND SERIES

References


Code	Finish	Light Color	Power	Lense		Voltage-Current	Driver
VL-WUS*	SS Stainless Steel	W24 2400K	0,5W	3°	6°	350 CC350mA	STD ON/OFF
	BK Black	W27 2700K	1W	10°	15°	700 CC700mA	R Remote 230V
	BR Brass	W30 3000K	2W	20°	25°		R010 Remote 0-10V
	RAL Any RAL color	W40 4000K	3W	40°	60°	12 12Vdc	RD Remote DALI
		W60 6000K	4W	120°	ASYM	24 24Vdc	RDMX Remote DMX
		R Red	5W				RPWM Remote PWM
		B Blue	7W			RTR Remote TRIAC	
		G Green					
		A Amber					

* Not all options are available, please refer to table on page 2 to choose the correct reference

Reference example

VL-WUS-SS-W24-3W-20°-700-STD

Dimensions

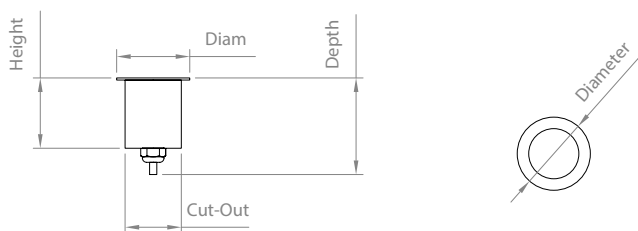

Accesories

Code	Accesories
VL-WUS	HC Honeycomb Grid HS Half shield STS Star shape shield *CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-WUS-CBL-10m*



Available options

Power	Availabre beam angles	Voltage/Current	Diameter	Height	Cut-Out	Depth needed	Driver support
0,5 W	120	24Vdc	35 mm	31 mm	30 mm	35 mm	On/Off
1 W	25/40/60	CC 350mA	35 mm	31 mm	30 mm	35 mm	DALI/DMX/1-10V/Triac/PWM
1 W	25/40/60	12Vdc / 24Vdc	35 mm	55 mm	30 mm	60 mm	On/Off
2 W	10/15/20/40/60	12Vdc / 24Vdc	52 mm	60 mm	40 mm	65 mm	On/Off
3 W	10/15/20/40/60	CC 700mA	52 mm	48 mm	40 mm	55 mm	DALI/DMX/1-10V/Triac/PWM
4 W	3/6/10/20/40	12Vdc / 24Vdc	64 mm	90 mm	52 mm	100 mm	On/Off
5 W	40/ASYM	24Vdc	79 mm	107 mm	65 mm	120 mm	On/Off
7 W	15/25/40/60	CC 350mA	79 mm	75 mm	65 mm	85 mm	DALI/DMX/1-10V/Triac/PWM
7 W	15/25/40/60	24Vdc	79 mm	102 mm	65 mm	110 mm	On/Off