

# UCE



IP67	IK10	CREE XP-G	RECYCLE
FAILURE RATE < 0,1% after 25,000h	LIFE TIME Tested over 50,000h	MIN -20°C MAX 55°C	CLASE I
SP US			

**UNDERGROUND  
UNDERGROUND SERIES**

## References

Code	Light Color	Size-Power	Lense		Voltage	Driver
<b>VL-UCE</b>	<b>White</b>					
	<b>W24</b> 2400K	<b>Size A-15W</b>	2°	4,5°	<b>UNIV</b> 100-264Vac	<b>STD</b> ON/OFF
	<b>W27</b> 2700K	<b>Size A-30W</b>	8°	12°		<b>010</b> 0-10V
	<b>W30</b> 3000K	<b>Size B-40W</b>	20°	30°		<b>DALI</b>
	<b>W40</b> 4000K	<b>Size B-80W</b>	40°	60°		<b>CAS</b> Casambi
	<b>W60</b> 6000K	<b>Size C-60W</b>	5x20°	10x70°		
	<b>Size C-120W</b>					
	<b>Single Color (SC)</b>					
	<b>R</b> Red	<b>Size A-15W</b>	4,5°	8°	<b>UNIV</b> 100-264Vac	<b>STD</b> ON/OFF
	<b>B</b> Blue	<b>Size A-30W</b>	12°	20°		<b>010</b> 0-10V
	<b>G</b> Green	<b>Size B-40W</b>	30°	40°		<b>DALI</b>
	<b>A</b> Amber	<b>Size B-80W</b>	60°	5x20°		<b>CAS</b> Casambi
		<b>Size C-60W</b>	10x70°			
		<b>Size C-120W</b>				
	<b>RGBW</b>					
	<b>RGBW3</b>	<b>Size C-150W</b>	15°	20°	<b>UNIV</b> 100-264Vac	<b>DMX</b>
	4 in 1 Chip		30°	60°		
	RGB+W3000K		15x60°			
	<b>RGBW4</b>					
	4 in 1 Chip					
	RGB+W4000K					
	<b>RGBW7</b>					
	7in1 chip					
	RGBWCLA					
	(Only for size C)					

Reference example

VL-UCE-W27-Size C-60W-5x20 -UNIV-STD

## Variations




**SIZE A**  
220x220mm



**SIZE B**  
270x270mm




**SIZE C**  
320x320mm


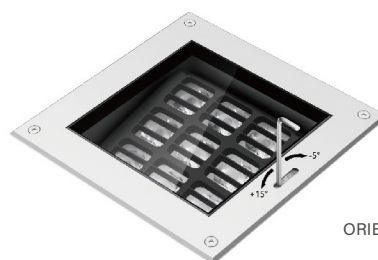


ORIENTED FROM OUTSIDE



## Dimensions




**SIZE A**



**SIZE B**



**SIZE C**



## Accessories

Stainless steel recessed box is always included with the projector

Code	Accessories
VL-UCE	*CBLX Special length cable * Instead of X, put length of cable needed Example: VL-UCE-CBL-10m