


# UNDERLINE.100

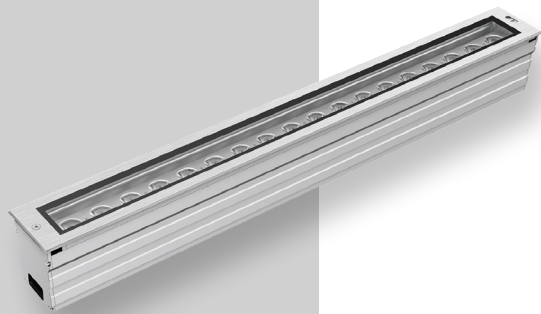

|                                      |                                  |                       |         |
|--------------------------------------|----------------------------------|-----------------------|---------|
| IP67                                 | IK10                             | CREE XP-G             | RECYCLE |
| FAILURE RATE<br>< 0,1% after 25,000h | LIFE TIME<br>Tested over 50,000h | MIN -20°C<br>MAX 55°C | CLASE I |
| SP US                                | CE                               | RoHS                  | RoHS 2  |

**UNDERGROUND  
UNDERGROUND SERIES**


## References

| Code              | Light Color              | Size-Power  | Lense                         |               | Voltage                | Driver             |
|-------------------|--------------------------|---|-------------------------------|---------------|------------------------|--------------------|
| <b>VL-UND.100</b> | <b>White</b>             |   |                               |               |                        |                    |
|                   | <b>W24</b> 2400K         | <b>300mm - 20W</b>  | <b>2,5°</b>                   | <b>6°</b>     | <b>UNIV 100-264Vac</b> | <b>STD ON/OFF</b>  |
|                   | <b>W27</b> 2700K         | <b>300mm - 30W</b>  | <b>12°</b>                    | <b>20°</b>    | <b>24 24Vdc</b>        | <b>010 0-10V</b>   |
|                   | <b>W30</b> 3000K         | <b>500mm - 30W</b>  | <b>30°</b>                    | <b>40°</b>    |                        | <b>DALI</b>        |
|                   | <b>W40</b> 4000K         | <b>500mm - 50W</b>  | <b>60°</b>                    | <b>5x20°</b>  |                        | <b>DALI</b>        |
|                   | <b>W60</b> 6000K         | <b>1000mm - 60W</b><br><b>1000mm - 100W</b>                       | <b>10x70</b>                  |               |                        | <b>CAS Casambi</b> |
|                   | <b>Single Color (SC)</b> |   |                               |               |                        |                    |
|                   | <b>R</b> Red             | <b>300mm - 20W</b>  | <b>6°</b>                     | <b>12°</b>    | <b>UNIV 100-264Vac</b> | <b>STD ON/OFF</b>  |
|                   | <b>B</b> Blue            | <b>300mm - 30W</b>  | <b>20°</b>                    | <b>30°</b>    | <b>24 24Vdc</b>        | <b>010 0-10V</b>   |
|                   | <b>G</b> Green           | <b>500mm - 30W</b>  | <b>40°</b>                    | <b>60°</b>    |                        | <b>DALI</b>        |
|                   | <b>A</b> Amber           | <b>500mm - 50W</b><br><b>1000mm - 60W</b><br><b>1000mm - 100W</b> | <b>5x20°</b><br><b>10x70°</b> |               |                        | <b>CAS Casambi</b> |
|                   | <b>RGBW</b>              |   |                               |               |                        |                    |
|                   | <b>RGBW3</b>             | <b>300mm - 20W</b>  | <b>15°</b>                    | <b>20°</b>    | <b>UNIV 100-264Vac</b> | <b>DMX</b>         |
|                   | 4 in 1 Chip              | <b>300mm - 30W</b>  | <b>30°</b>                    | <b>60°</b>    | <b>24 24Vdc</b>        |                    |
|                   | RGB+W3000K               | <b>500mm - 30W</b>  | <b>10x30°</b>                 | <b>10x60°</b> |                        |                    |
|                   | <b>RGBW4</b>             | <b>500mm - 50W</b><br><b>1000mm - 60W</b><br><b>1000mm - 100W</b> |                               |               |                        |                    |
|                   | 4 in 1 Chip              |   |                               |               |                        |                    |
|                   | RGB+W4000K               |   |                               |               |                        |                    |

Reference example

**VL-UND.100-B-1000-100W-5x20-24-DALI**

## Dimensions

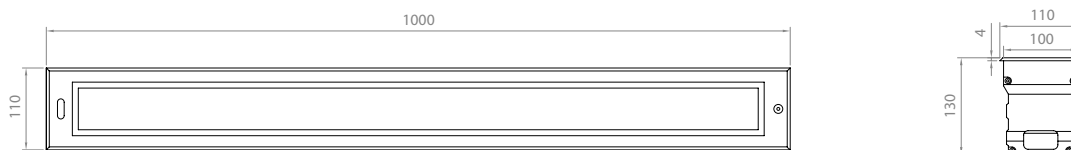

## Accessories

| Code              | Accessories  |
|-------------------|--|
| <b>VL-UND.100</b> | <b>HC</b> Honeycomb Grid<br><b>MSH</b> Mesh+Grid<br><br>Stainless steel recessed box is always included with the projector |

| Code              | Accessories                       |
|-------------------|-----------------------------------|
| <b>VL-UND.100</b> | <b>*CBLX</b> Special length cable |

*\* Instead of X, put length of cable needed  
Example: VL-UND.100-CBL-10m*