


UNDERLINE.80

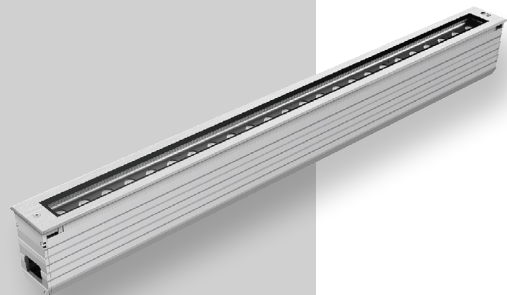

IP67	IK10	CREE XP-G	RECYCLE
FAILURE RATE < 0,1% after 25,000h	LIFE TIME Tested over 50,000h	MIN -20°C MAX 55°C	CLASE I

**UNDERGROUND
UNDERGROUND SERIES**


References

Code	Light Color	Size-Power	Lense		Voltage	Driver
VL-UND.80	White					
	W24 2400K	300mm - 7W	8°	12°	UNIV 100-264Vac	STD ON/OFF
	W27 2700K	300mm - 11W	20°	30°	24 24Vdc	010 0-10V
	W30 3000K	500mm - 11W	45°	60°		DALI
	W40 4000K	500mm - 14W	15x30°	10x60°		DALI
	W60 6000K	1000mm - 21W 1000mm - 28W 1000mm - 45W				CAS Casambi
	Single Color (SC)					
R Red	300mm - 7W	8°	12°	UNIV 100-264Vac	STD ON/OFF	
B Blue	300mm - 11W	20°	30°	24 24Vdc	010 0-10V	
G Green	500mm - 11W	45°	60°		DALI	
A Amber	500mm - 14W 1000mm - 21W 1000mm - 28W 1000mm - 45W	15x30°	10x60°		CAS Casambi	
	RGBW					
RGBW3	500mm - 12W	15°	20°	UNIV 100-264Vac	DMX	
4 in 1 Chip	500mm - 24W	30°	60°	24 24Vdc		
RGB+W3000K	1000mm - 48W	10x30°	10x60°			
RGBW4	4 in 1 Chip					
RGB+W4000K						

Reference example

VL-UND.80-R-1000-100W-5x20-UNIV-STD

Dimensions

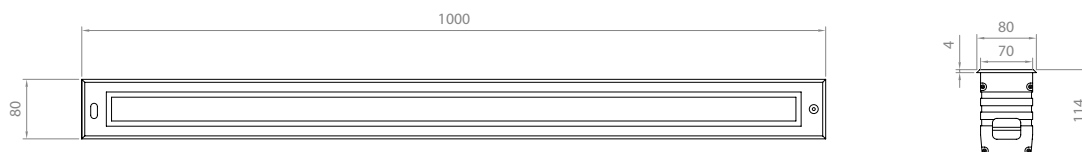

Accessories

Code	Accessories
VL-UND.80	HC Honeycomb Grid Stainless steel recessed box is always included with the projector

Code	Accessories
VL-UND.80	*CBLX Special length cable

** Instead of X, put length of cable needed
Example: VL-UND.80-CBL-10m*