

SHIFT.UD



IP67



IK10



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



EFFECTS
EFFECTS SERIES

References

Code	Light Color	Size-Power	Lense		Voltage	Driver
VL-SHIFT.UD	White					
	W24 2400K	Size A - 8W	8°	12°	UNIV 100-264Vac	STD ON/OFF
	W27 2700K	Size B - 16W	20°	30°		010 0-10V
	W30 3000K	Size C - 21W	45°	60°		DALI
	W40 4000K	Size D - 36W	ASYM			CAS Casambi
	W60 6000K					
	Single Color (SC)					
	R Red	Size A - 8W	8°	12°	UNIV 100-264Vac	STD ON/OFF
	B Blue	Size B - 16W	20°	30°		010 0-10V
	G Green	Size C - 21W	45°	60°		DALI
	A Amber	Size D - 36W	ASYM			CAS Casambi

Reference example

VL-SHIFT.UD-W60-SizeA-8W-ASYM-UNIV-STD

Variations



SIZE A
D=100mm
L=170mm



SIZE B
D=100mm
L=250mm




SIZE C
D=155mm
L=250mm




SIZE D
D=155mm
L=350mm


Dimensions

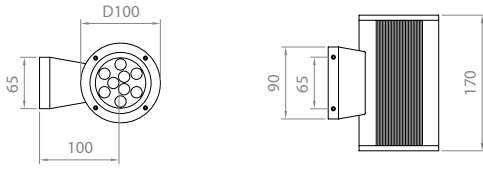


SIZE A

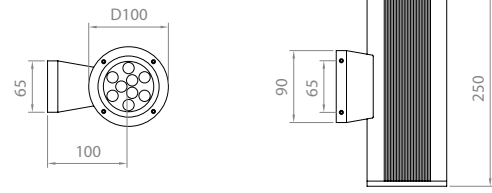

SIZE B

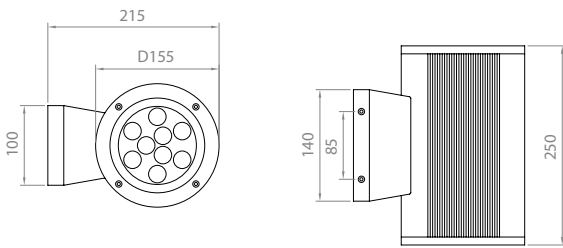

SIZE C

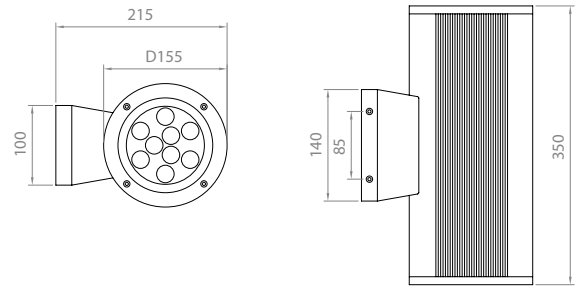

SIZE D