

# SHIFT.D



IP67	IK10	CREE XP-G	RECYCLE
FAILURE RATE < 0,1% after 25,000h	LIFE TIME Tested over 50,000h	MIN -20°C MAX 55°C	CLASE I
c Us			

**EFFECTS**  
**EFFECTS SERIES**


## References

Code	Light Color	Size-Power	Lense		Voltage	Driver
<b>VL-SHIFT.D</b>	<b>White</b>					
	<b>W24</b> 2400K	<b>Size A</b> -3,5W	<b>8°</b>	<b>12°</b>	<b>UNIV</b> 100-264Vac	<b>STD</b> ON/OFF
	<b>W27</b> 2700K	<b>Size A</b> - 8W	<b>20°</b>	<b>30°</b>		<b>010</b> 0-10V
	<b>W30</b> 3000K	<b>Size B</b> - 11W	<b>45°</b>	<b>60°</b>		<b>DALI</b>
	<b>W40</b> 4000K	<b>Size B</b> - 16W	<b>ASYM</b>			<b>CAS</b> Casambi
<b>W60</b> 6000K						
	<b>White - COB Led module (SC)</b>					
	<b>W30</b> 3000K	<b>Size A</b> -10W	<b>15°</b>		<b>UNIV</b> 100-264Vac	
	<b>W40</b> 4000K	<b>Size B</b> - 26W				
	<b>Single Color (SC)</b>					
	<b>R</b> Red	<b>Size A</b> -3,5W	<b>8°</b>	<b>12°</b>	<b>UNIV</b> 100-264Vac	<b>STD</b> ON/OFF
	<b>B</b> Blue	<b>Size A</b> - 8W	<b>20°</b>	<b>30°</b>		<b>010</b> 0-10V
	<b>G</b> Green	<b>Size B</b> - 11W	<b>45°</b>	<b>60°</b>		<b>DALI</b>
	<b>A</b> Amber	<b>Size B</b> - 16W	<b>ASYM</b>			<b>CAS</b> Casambi


Reference example

VL-SHIFT.D-W40-SizeB-16W-ASYM-UNIV-STD

## Dimensions

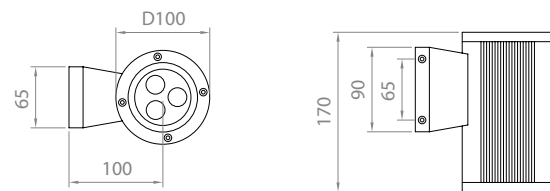

**SIZE A**

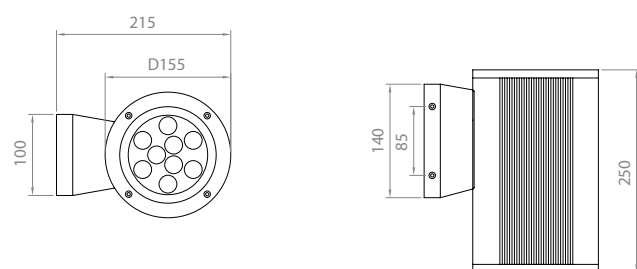

**SIZE B**

## Variations



**SIZE A**  
D=100mm



**SIZE B**  
D=155mm